




TORQUE SCREWDRIVERS



Versatile, accurate and easy torquing for smaller fasteners and restricted spaces

- Accuracy to ±6% meets the requirements of ISO 6789-1:2017
- Supplied with ¼" hexagon bit holder
- Single scale, either N-m or lbf-in

NOTE: Bit set is only sold separately or as part of kit - see website for bit set details

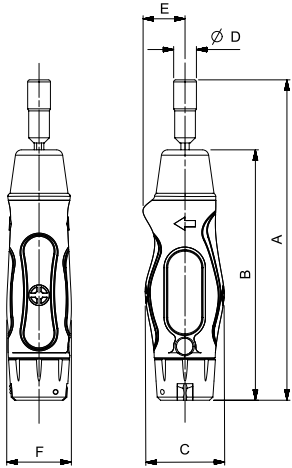

MODEL	ALL MODELS
Dimensions (mm)	
A	155
B	121
C	38
∅D	11
E	20
F	31
Weight (kg)	0.2

2 ADJUSTABLE N-m

13850	TTs1.5, ¼", 0.3 - 1.5 N-m
13851	TTs3.0, ¼", 0.6 - 3 N-m
13852	TTs6.0, ¼", 1.2 - 6 N-m

2 ADJUSTABLE lbf-in

13853	TTs13, ¼", 2.5 - 13 lbf-in
13854	TTs26, ¼", 5 - 26 lbf-in
13855	TTs53, ¼", 10 - 53 lbf-in


2 PRODUCTION 'P' TYPE

13856	TTs1.5, ¼", 0.3 - 1.5 N-m, 2.5 - 13 lbf-in
13857	TTs3.0, ¼", 0.6 - 3 N-m, 5 - 26 lbf-in
13858	TTs6.0, ¼", 1.2 - 6 N-m, 10 - 53 lbf-in
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

2 ADJUSTABLE N-m KIT

13700	TTs0.3 - 1.5 N-m Kit with 12 piece bit set and case
13701	TTs0.6 - 3 N-m Kit with 12 piece bit set and case
13702	TTs1.2 - 6 N-m Kit with 12 piece bit set and case
28937	12 Piece ¼", Hex bit set

TT TORQUE WRENCHES

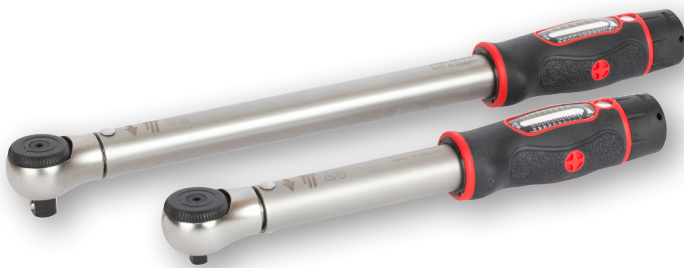

For no-nonsense torquing - comfortable, accurate and easy to use

- Accurate to ±3% of reading which meets the requirements of ISO 6789-1:2017
- Micrometer scale for simple and error free setting
- All models feature a lock to prevent accidental adjustment of the set torque
- Handle and lens materials resistant to commonly used industrial chemicals



TTi Reversible Ratchet



TTf Fixed Head



TTfth Torque Handle

2 RATCHET ADJUSTABLE - DUAL SCALE

13830	TTi20, ¼", 4 - 20 N-m, 35 - 180 lbf-in
13831	TTi20, ⅜", 4 - 20 N-m, 35 - 180 lbf-in
13841	TTi50, ⅜", 10 - 50 N-m, 8 - 35 lbf-ft
13842	TTi50, ½", 10 - 50 N-m, 8 - 35 lbf-ft

2 RATCHET ADJUSTABLE - N-m ONLY

13832	TTi20, ¼", 4 - 20 N-m
13833	TTi20, ⅜", 4 - 20 N-m
13843	TTi50, ⅜", 10 - 50 N-m
13844	TTi50, ½", 10 - 50 N-m

2 RATCHET ADJUSTABLE - lbf-ft ONLY

13834	TTi15, ¼", 35 - 180 lbf-in
13835	TTi15, ⅜", 35 - 180 lbf-in
13845	TTi35, ⅜", 8 - 35 lbf-ft
13846	TTi35, ½", 8 - 35 lbf-ft

2 FIXED HEAD ADJUSTABLE

13836	TTf 20, ⅜", 4 - 20 N-m, 35 - 180 lbf-in
13837	TTf 20, ⅜", 4 - 20 N-m (N-m ONLY)
13838	TTf 15, ⅜", 35 - 180 lbf-in (lbf-in ONLY)

2 FEMALE TORQUE HANDLE ADJUSTABLE

13839	TTfth 20, 9 x 12 mm, 4 - 20 N-m, 35 - 180 lbf-in
13847	TTfth 50, 9 x 12 mm, 10 - 50 N-m, 8 - 35 lbf-ft
13840	TTfth 20, 9 x 12 mm, 4 - 20 N-m (N-m ONLY)
13848	TTfth 50, 9 x 12 mm, 10 - 50 N-m (N-m ONLY)